

# MAXX 2602




4 - 14 years



40 kids



70,7 m<sup>2</sup>

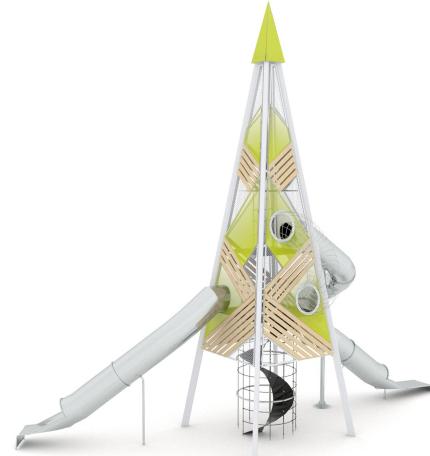

## Material specification

- Hot-dip galvanized and powder coated construction of 200 x 120 mm profile,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Side panels made of Robinia - very durable acacia wood without sharp edges, resistant to weather conditions
- Stainless steel tube slide,
- Elements made of safe, certified rubber with textile reinforcement,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel screws and/or screws covered with plastic caps,



Physical development



hiding



observation



climbing



sliding



community








**1**  
number of towers



**2**  
number of slides



**6**  
number of activity elements

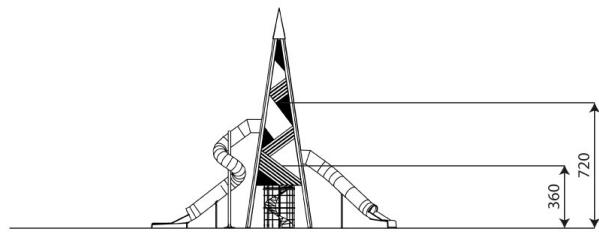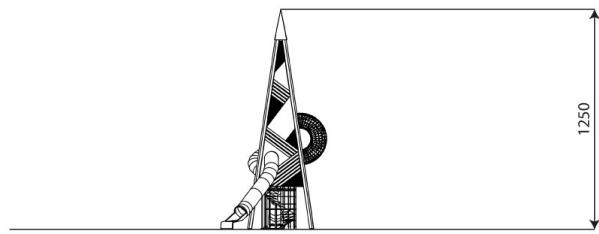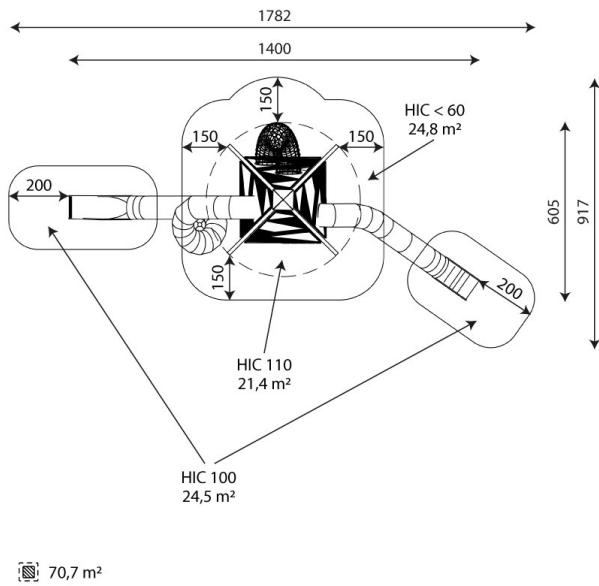

## Guarantee



30 year guarantee -  
Durability of steel and  
stainless steel  
structural elements



15 year guarantee - Durability  
of steel and stainless steel  
structures of mobile devices;  
durability of Robinia wood  
structural elements



10 year guarantee - Structural  
strength of HDPE, 100% recycled  
HDPE and HPL elements;  
structural elements made of  
100% recycled material  
(composite)



5 year guarantee - Corrosion resistance  
of stainless steel and hot-dip galvanized  
and powder-coated steel elements,  
resistance to bark beetles and rotting of  
wooden structural elements

Detailed information in the guarantee card

## Product technical sheet

# MAXX 2602

### Product data

Length	1400 cm
Width	605 cm
Total height	1250 cm
Age group	4 - 14 years
Number of users	40 kids
Safety zone	70,7 m <sup>2</sup>
Free fall height	110 cm
The height of the platforms	360, 540, 720 cm
tube slide platform height	360, 540 cm
In accordance with norm EN	1176-1:2017+A1:2023
Availability of spare parts	YES

Data is subject to change without prior notice.

### Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;



## Surfaces according to EN 1176-1:2017+A1:2023

## MAXX 2602

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		110

Amount of safe surface corresponding with free fall height:

HIC <60	24,8 m <sup>2</sup>
HIC 100	24,5 m <sup>2</sup>
HIC 110	21,4 m <sup>2</sup>

Data is subject to change without prior notice.

