

















Unit Specification

	0.9m x 0.9m x 1.7m		
	1.0m		
	34kg		
	23kg		
	0.2m x 0.2m x 2.4m		
	2.4m		
	0.08m ³		
	4.5m x 4.5m x 2.8m		
	1 Person(s)		
	2 Hour(s)		
			Bolt length measured as diagram.


PARTS LIST

Part	Qty	Image	Description
CAWL002	1		Aero Whirl Top Assembly
CART002	1		Aero Tilt Ground Fixing Assembly
KT/CGBL	1	Kitting Gravity Bowl	
F120	3		M10 S/S Nylock Nut
F480	3		M10 x 25 mm S/S Security Bolt

Loosefill and Impact Area

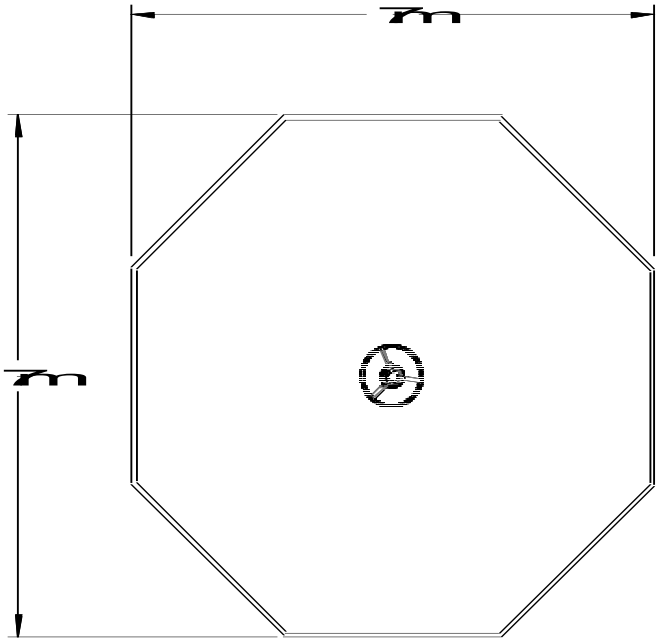


Impact Area Cross Checks

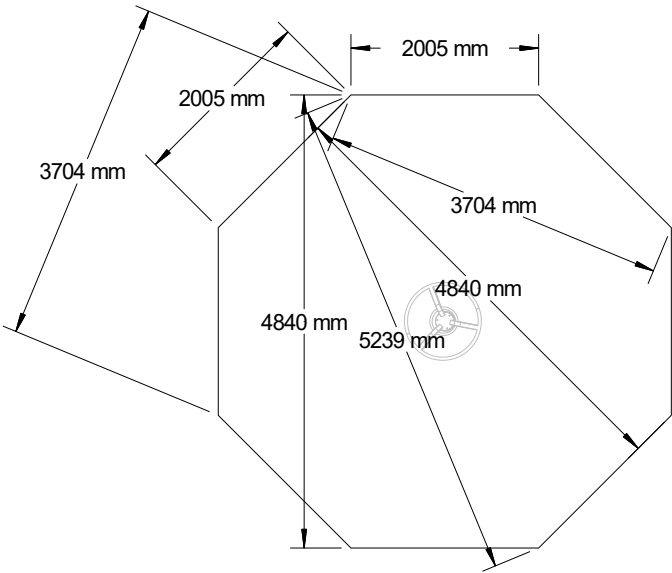

Surfacing Specification	
Finished Gradient	1:50 max
Free Height of Fall	1.0m
Impact Area	19.4m ²
Impact Area Perimeter	16m
Loosefill Area	10m ³
Loosefill Area Perimeter	16m

NOT TO SCALE

Standard Foundation Plan

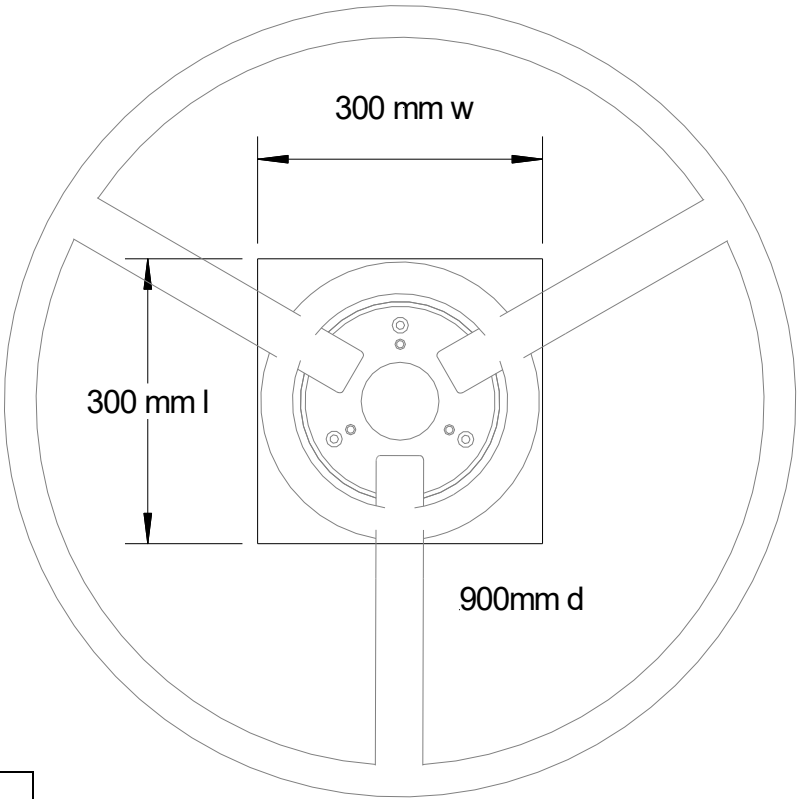

0.08m³

Minimum Concrete Specification: C16/20 (2900 N/mm² (20 N/mm²) min. compressive strength)


Recommended Mix: 1 part cement/ 2 part sand/ 4 part stone.

NOT TO SCALE



Standard Foundation Detail	Loosefill Foundation Detail
<p>0</p> <p>(l) mm x (w) mm</p> <p>Finished Ground Level</p> <p>100mm</p> <p>(d) mm</p> <p>NOT TO SCALE</p>	<p>0</p> <p>(l) mm x (w) mm</p> <p>Ground Level</p> <p>200mm</p> <p>100mm</p> <p>(d) mm</p> <p>45°</p> <p>Loosefill Max. 400mm Min. 250mm</p> <p>NOT TO SCALE</p>

NOTE: All holes must taper out from hole width at top of hole (as shown) to give maximum stability. In loose or sandy ground all hole width dimensions should be increase by approximately 50%.



1		
CART002	1	
F207	3	

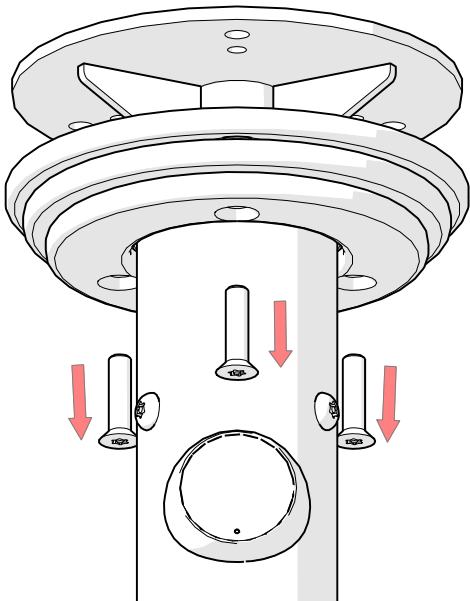

2		
CAWL002	1	
F469	3	
F120	3	

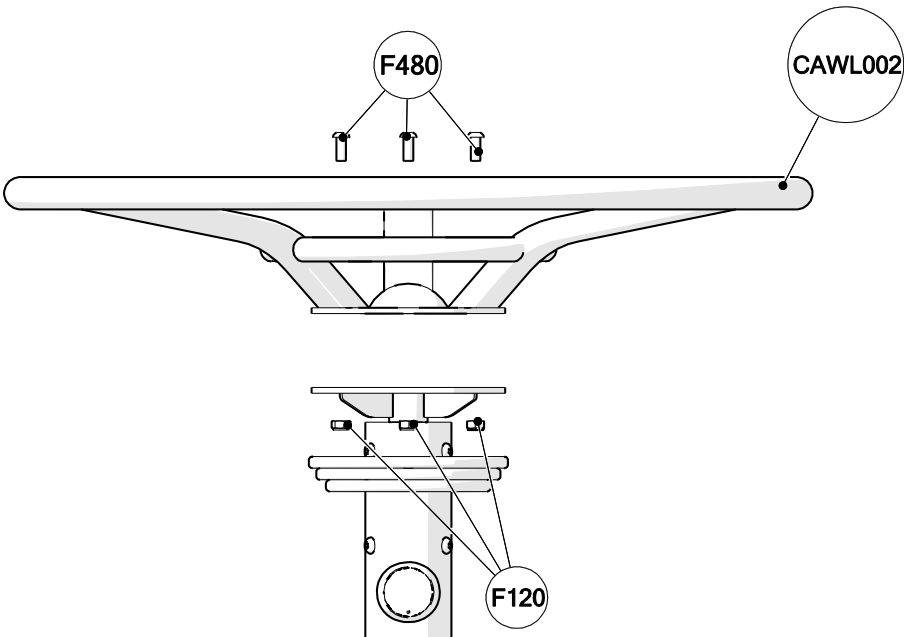

3		
F207	3	

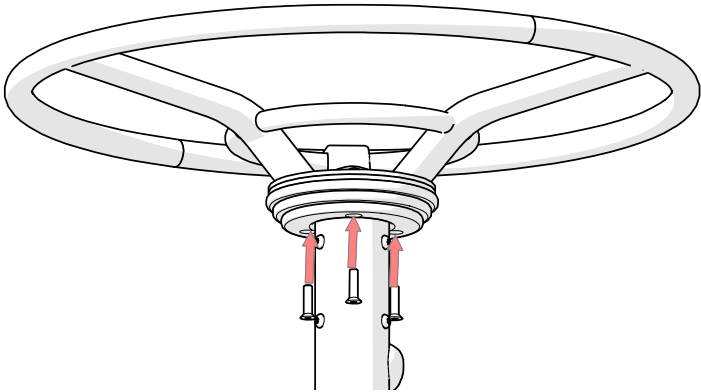

4

