


WOODEN WD1405

PLAYGROUND EQUIPMENT



|                                    |                      |
|------------------------------------|----------------------|
| Safety zone                        | 26,00 m <sup>2</sup> |
| Length                             | 3,28 m               |
| Width                              | 2,45 m               |
| Total height                       | 3,37 m               |
| Free fall height                   | 1,50 m               |
| Age range                          | 3- 14 years          |
| In accordance w/ EN standards      | 1176-1:2017          |
| Weight of the heaviest part [kg]   | 40                   |
| Dimension of the biggest part [cm] | 365x9x9              |
| Availability of spare parts        | Yes                  |

Minimal space

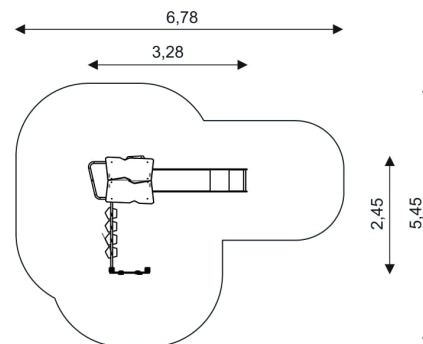

**Material Specification**

- 90x90 mm main construction made of impregnated, laminated wood of pine;
- Top of the construction is secured with polyethylene caps to protect the wood surface from atmospheric conditions;
- Metal anchors are made of hot dip galvanized steel, protecting the wood from direct contact with the ground to prevent rot and extending the product's life;
- Platform and climbing wall is made of anti-slip and waterproof plywood or HPL plate;
- Panels and roofs are made of atmospheric condition resistant HDPE or HPL plates;
- Stainless steel screws or screws covered with plastic caps;
- No sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- Bars and fireman's pole are made out of stainless steel;
- Stainless steel slide with HDPE or HPL side panels;
- Steel ropes braided with PP, connected by durable plastic elements;
- Durable climbing rocks;

**Additional comments**

- The equipment is certified by an accrediting organization or by certificate of conformity;
- Depth of foundations on a flat surface: 80/70/60 cm;
- The equipment is designed for public playgrounds;
- Slides should not be installed southwards;

**Surfaces**

Due to the free fall height of the equipment, the EN 1176-1:2017 standard allows the following surfaces: sand with minimal layer thickness of 30 cm (A,C), synthetic material approved for free fall of 1,50 m (A,B,C)

