

**RECYCLED RC0543**

1-3/3-14



7 kids

19,4 m<sup>2</sup>**Material specification**

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite,
- Hot-dip galvanized and powder coated or powder galvanized and powder coated or stainless steel construction elements,
- The covers are made of recycled HDPE panel, resistant to weather conditions
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,



Facilitating disability



easy access



integration



Physical development






rest



rocking



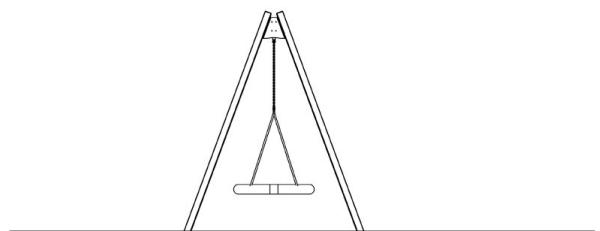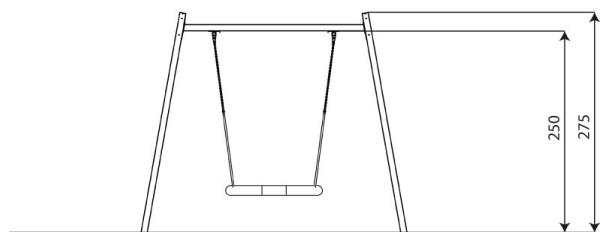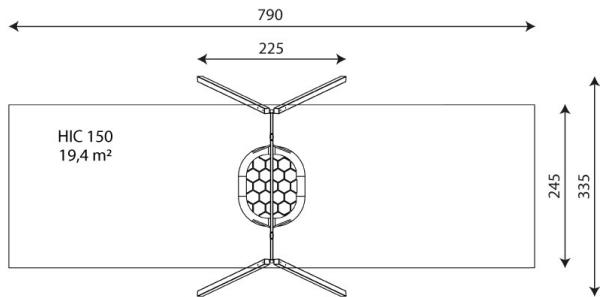

## Product technical sheet

# RECYCLED RC0543

### Product data

Length	225 cm
Width	335 cm
Total height	275 cm
Age group	1-3/3-14 years
Number of users	7 kids
Safety zone	19,4 m <sup>2</sup>
Free fall height	150 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	27 kg
Dimensions of the largest part	345x9x9 cm
Availability of spare parts	YES
Installation time	2 h

Data is subject to change without prior notice.

### Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

### Guarantee

**30**

30 year guarantee -  
Durability of steel and  
stainless steel  
structural elements

**15**

15 year guarantee - Durability  
of steel and stainless steel  
structures of mobile devices;  
durability of Robinia wood  
structural elements

**10**

10 year guarantee - Structural  
strength of HDPE, 100% recycled  
HDPE and HPL elements;  
structural elements made of  
100% recycled material  
(composite)

**5**

5 year guarantee - Corrosion resistance  
of stainless steel and hot-dip galvanized  
and powder-coated steel elements,  
resistance to bark beetles and rotting of  
wooden structural elements

Detailed information in the guarantee card



	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		150

**Amount of safe surface corresponding with free fall height:**

HIC 150 19,4 m<sup>2</sup>

Data is subject to change without prior notice.

