

# TOPICCO 3107



2 - 8 years



24 kids



34,8 m<sup>2</sup>

## Material specification

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction,
- Platforms and climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Structure for platforms made of hot-dip galvanized and powder coated steel;
- Roofs and side panels made of durable HDPE plate, resistant to weather conditions,
- Transparent polycarbonate panels with a weather-resistant print,
- Rubber door with textile reinforcement,
- Slides made of stainless steel with durable HDPE side panels,
- Moving elements made of durable HDPE plate, resistant to weather conditions,
- Windows and/or elements made of polycarbonate,
- Moving drum made of HDPE plate, resistant to weather conditions, and transparent polycarbonate, plastic balls,
- Elements made of safe, certified rubber with textile reinforcement,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Seats made of durable HDPE plate, resistant to weather conditions,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel bars,
- Stainless steel screws and/or screws covered with plastic caps,



### Facilitating disability



easy access



seats



shelters



integration



### Intellectual development



manipulation



sight



sensorics



thinking



### Physical development



hiding



community



climbing



roofs



sliding



rest



crawling





**1**  
number of towers



**2**  
number of slides



**1**  
number of roofs



**10**  
number of interactive elements



**2**  
number of activity elements

**Product technical sheet**

**TOPICCO 3107**




**Product data**

Length	420 cm
Width	300 cm
Total height	210 cm
Age group	2 - 8 years
Number of users	24 kids
Safety zone	34,8 m2
Free fall height	<60 cm
slide platform height	59 cm
In accordance with norm EN	1176-1:2017+A1:2023
Availability of spare parts	YES

Data is subject to change without prior notice.

**Additional information**

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

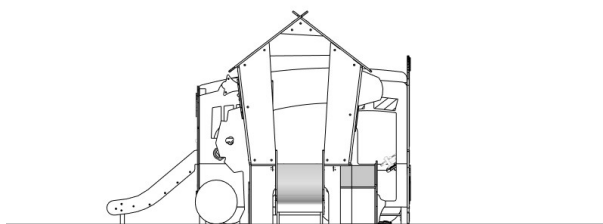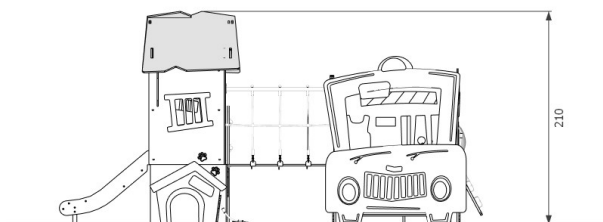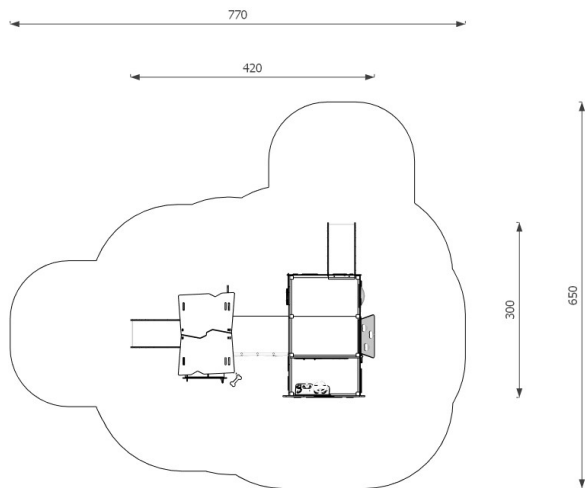

**Guarantee**

**30**

30 year guarantee - Durability of steel and stainless steel structural elements

**15**

15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10**

10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5**

5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card

**Vinci Sp. z o.o.**  
Seminaryjna 9 Street  
99-400 Łowicz

VAT: 534-265-18-84  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

**Surfaces according to EN 1176-1:2017+A1:2023**

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		<60

**Amount of safe surface corresponding with free fall height:**

HIC <60 34,8 m<sup>2</sup>

Data is subject to change without prior notice.

